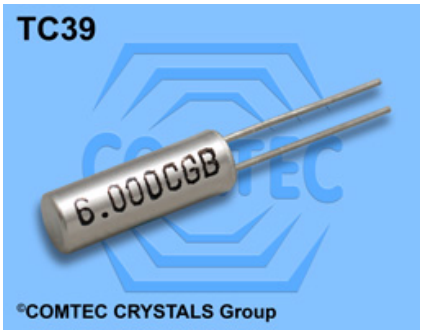


Quartz Crystal Unit TC-39

- Cylinder Metal Case (3.0 x 9.0) mm
- Available in many standard and special frequencies
- Applications for Clock and Microcomputer
- RoHS conform; Lead-free product

External Dimensions

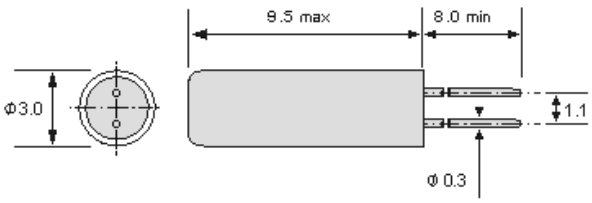


Soldering Conditions

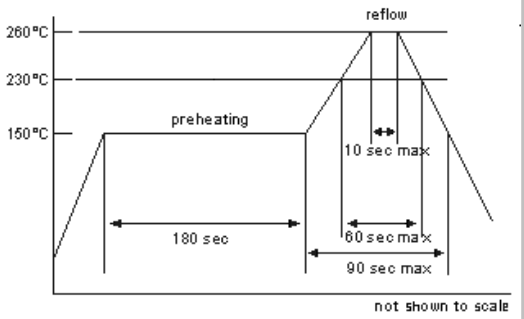


## Specifications - Product No. A004915200AOFAPN00BB

| | |
|---|---|
| Holder Type: | TC-39 |
| Frequency: | 4.915200 MHz |
| Frequency Stability at 25°C: | ±50 ppm |
| Temperature Stability: | ±50ppm @ -20°C to +70°C |
| Storage Temperature: | -40°C to +85°C |
| Drive Level: | 1.0 µW max. |
| Load Capacitance (CL): | 12.5 pF |
| Shunt Capacitance (C0): | < 7pF |
| Crystal Cut & Vibration Mode: | AT- cut, fundamental |
| Equivalent Series Resistance: | 200 Ohm max. |
| Aging: | < ±5 ppm max./year |

GERMANY:
COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
85586 Poing / GERMANY
Phone +49 8121 778160 · Fax +49 8121 778177
e-Mail info@comtec-crystals.com
Internet: http://www.comtec-crystals.com
Subject to change without prior notice.

Technical Data and Graphics are all under Copyright (c) of Comtec Crystals Group.

FRANCE:
COMTEC CRYSTALS SARL · 23, rue du Faucon
67500 Haguenau / FRANCE
Phone +33 388 732162 · Fax +33 388 730118
e-Mail sales@comtec-crystals.com
Internet: http://www.comtec-crystals.com
Sous réserve de modifications.