
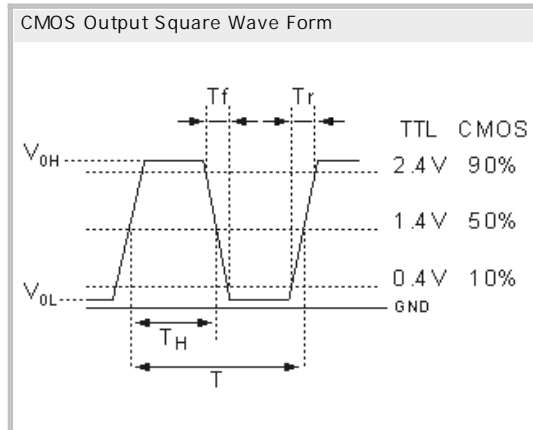


## OCXO-20T5.0 5.0V Oven Controlled Crystal Oscillator

- 5 pin solder sealed in metal package (20.3 x 20.3 x 10.5) mm
- HCMOS Square Wave, SC-cut crystal
- Voltage control (Electronic Frequency Tuning) is standard
- RoHS conform; Lead-free product
- Vibration: 10 to 2000 Hz / 10 G
- Shock: 2000 G, 0.3ms 1/2 sine
- Available in many standard and special frequencies

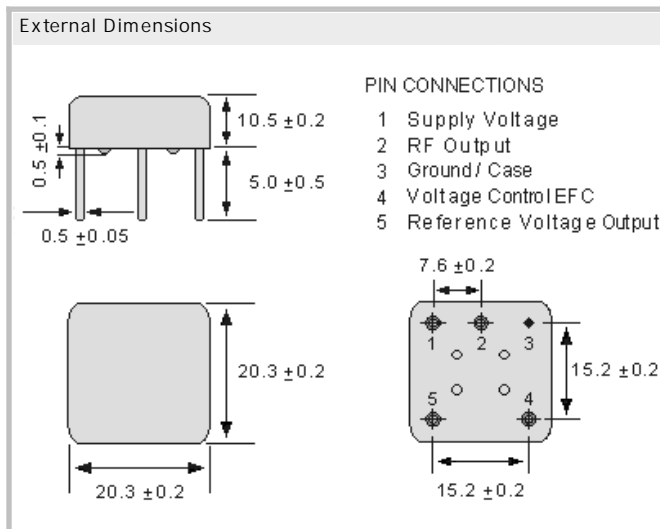

## Specifications - Product No. G032000000KL1UPNCFVA

Holder Type:	OCXO-20T5.0 5.0V (Voltage code is " 5.0 " )
Supply Voltage range:	+ 5.0V ± 5%
Frequency:	32.000000 MHz
Initial Calibration Tolerance:	± 0.5ppm max., $V_{con} = +2.5V$
Frequency Stability:	(FS)
(FS) Operating Temperature Range:	± 0.01ppm , -37°C to +33°C , SC-cut
(FS) Warm up time (+ 25°C):	SC-cut: 1.0minutes (max.), within ± 0.1 ppm of its reference frequency
(FS) Aging:	SC-cut: ± 2.0ppb max./day, 0.1 ppm max. first year, 0.5ppm over 10 years
(FS) Voltage Change:	± 0.20ppb, supply voltage ± 5% variation
(FS) Load Change:	± 0.20ppb, for ± 5% load condition change
Voltage Control on pin 4 (EFC):	Electronic Frequency Tuning
(EFC) Freq. Deviation Range:	SC-cut: ± 0.5ppm (min.), ± 2.0ppm (max.) fo at + 25°C + over oper. temp. range
(EFC) Control Voltage Range:	2.5V ± 2.0V
(EFC) Transfer Function:	Positive: Increasing control voltage increases output frequency
(EFC) Input Impedance:	100 k (min.) // (EFC) Linearity ± 10 % (max.)
Power Dissipation (at 25°C):	steady-state : 250mA (max.) , turn-on: 500mW (max.)
Output:	Load (Fan out) : 15pF HCMOS (max.) Output Logic: High (Voh) + 4.5V (min), Low (Vol) + 0.5V (max.) Duty Cycle (at 50% Vcc) : 50% ± 10% Rise and Fall Time (20% to 80%) : 5ns (max.) (20% to 80% of waveform)
Output Phase Noise (10MHz) SC-cut:	-85dBc/Hz @ 1Hz, -120dBc/Hz @ 10Hz, -140dBc/Hz @ 100Hz, -145dBc/Hz @ 1kHz, -150dBc/Hz @ 10kHz
Storage Temperature:	-55~ + 125°C

### GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14  
8 5 5 8 6 P o i n g / G E R M A N Y  
Phone +49 8121 778160 · Fax +49 8121 778177  
e-Mail [info@comtec-crystals.com](mailto:info@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Subject to change without prior notice.



Technical Data and Graphics are all under  
Copyright (c) of Comtec Crystals Group.

### FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon  
6 7 5 0 0 H a g u e n a u / F R A N C E  
Phone +33 388 732162 · Fax +33 388 730118  
e-Mail [sales@comtec-crystals.com](mailto:sales@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Sous réserve de modifications.