


VC-TCXO5032





COMTEC CRYSTALS Group

VC-TCXO-Oscillator SMD VC-TCXO5032TB3.3
3.3V LVCMOS


- Voltage Control Temperature Compensated Crystal Oscillator
- SMD in ceramic case (5.0 x 3.2 x 1.2) mm
- LVCMOS Square Wave Output;
Wave form code is " T "
- Low Jitter, Peak-to-peak period jitter is 70 ps (typical)
- RoHS conform; Lead-free product; Tape & Reel
- Vibration: MIL-STD-202F method 204,
35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B,
test cond. E, 1000GG 1/2 sine wave

External Dimensions



Bottom View


- 1 Ground for TCXO;
Voltage Control for VCTCXO
- 2 Ground and Metal Lid
- 3 Output
- 4 Supply Voltage



Recommended Soldering Pattern



CMOS/TTL Output Wave Form

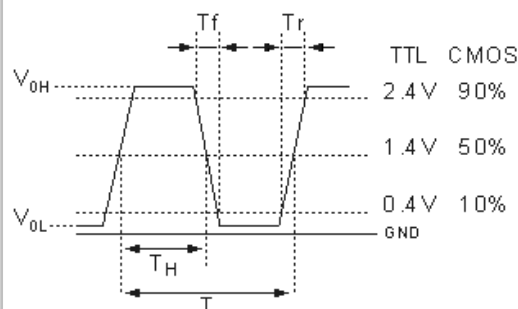

Specifications

Holder Type:	VC-TCXO5032TB3.3 3.3V (Voltage code is " 3 ")
Frequency Range:	1.00 MHz to 200.0 MHz
Input Voltage:	+ 3.3Vdd ± 5%
Frequency Stability:	±0.5ppm to ±3.0ppm
Freq. Stability vs Temperature:	0° to 50°C (±0.5ppm) to -40 to +85°C (±1.0 to ± 3.0ppm)
Freq. Stability vs Aging:	± 1.0 ppm, first year at 25°C
Freq. Stability vs Voltage Change:	± 0.3 ppm, for a ± 5% input voltage change
Freq. Stability vs Load Change:	± 0.3 ppm, for a ± 10% load condition change
Current Consumption:	8.0 mA (25MHz at +25°C); 20mA max(200MHz at +25°C)
Output Load:	15pF
Output Logic Levels:	Logic High "1" :90% Vdd min. Logic Low "1" :10% Vdd min.
Pin 1 Options VCTCXO only:	Control Voltage: Standard +1.5V ± 1.0V for all input voltages. Slope Polarity: Positive slope. Positive voltage for positive frequency shift. Input Impedance: 50kOhm min.; Linearity ±10% max. Modulation Bandwidth (at-3 dB) : 20kHz min.
Output Symmetry (Duty Cycle):	40/60% normal, 45/55% tight at 50%
Rise/Fall Time CMOS:	10.0ns max. Measured between 20% and 80% Vdd
Start Up Time:	5.0 ms (typ.), 10.0 ms (max.)
Phase Noise (133.333MHz):	-76dBc/Hz at 10Hz , -102dBc/Hz at 100Hz, -114dBc/Hz at 1kHz , -110dBc/Hz at 10kHz, -100dBc/Hz at 10kHz
Storage Temperature:	-40+85°C or -55 to +125°C (package dependent)
Reflow Condition:	260°C max. for 10 sec.

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
8 5 5 8 6 P o i n g / G E R M A N Y
Phone +49 8121 778160 · Fax +49 8121 778177
e-Mail info@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Subject to change without prior notice.



Technical Data and Graphics are all under
Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
6 7 5 0 0 H a g u e n a u / F R A N C E
Phone +33 388 732162 · Fax +33 388 730118
e-Mail sales@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Sous réserve de modifications.