


CM1210-2pad




Quartz Crystal Unit CM1210-2pad

- SMD in ceramic case (1.2 x 1.0 x 0.50) mm
- The whole package is grounded via the top metal lid and the two bottom pads.
- on Tape & Reel
- RoHS conform; Lead-free product

External Dimensions

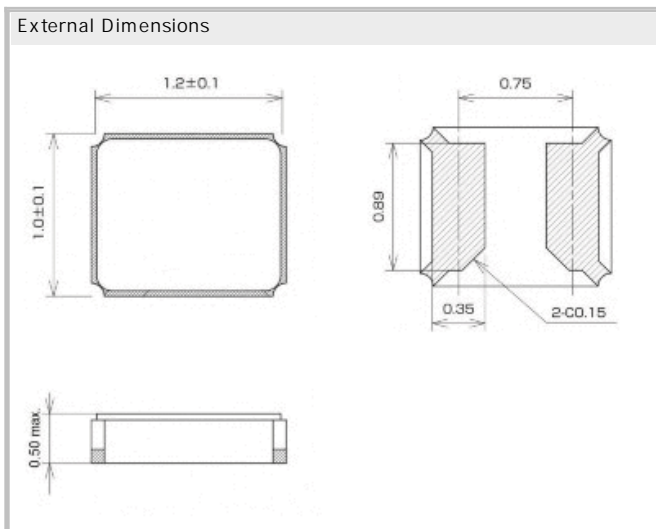

Soldering Conditions

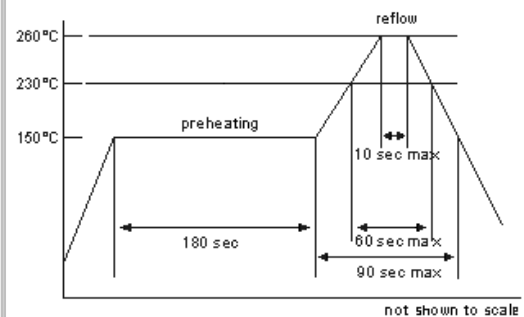

Specifications

Holder Type:	CM1210-2pad
Frequency Range:	32.768000 kHz
Frequency Stability at 25°C:	± 5 to ± 50 ppm
Temperature Stability:	± 20ppm @ -40°C to +85°C
Storage Temperature:	-40°C to +85°C
Drive Level:	0.1µW (< 0.5µW max.)
Temperature coefficient:	min. - 0.02, typ -0.03, max. -0.04 ppm/°C ²
Load Capacitance (CL):	12,5pF
Equivalent Series Resistance:	90 kOhm max.
Aging:	@ + 25°C ± 3°C < ± 3ppm max.

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
 8 5 5 8 6 P o i n g / G E R M A N Y
 Phone +49 8121 778160 · Fax +49 8121 778177
 e-Mail info@comtec-crystals.com
 Internet: <http://www.comtec-crystals.com>
 Subject to change without prior notice.



Technical Data and Graphics are all under
 Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
 6 7 5 0 0 H a g u e n a u / F R A N C E
 Phone +33 388 732162 · Fax +33 388 730118
 e-Mail sales@comtec-crystals.com
 Internet: <http://www.comtec-crystals.com>
 Sous réserve de modifications.