



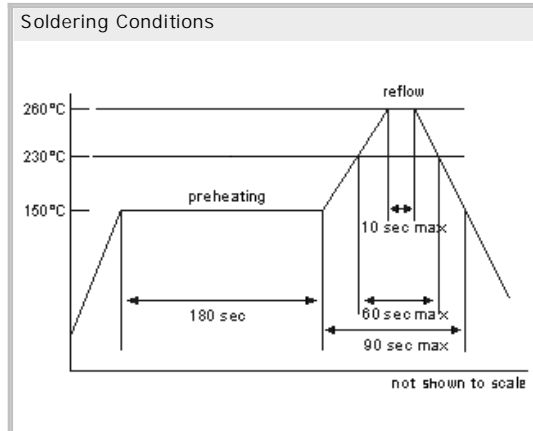

Quartz Crystal Unit CM6035-4pad HFF Series
High Frequency Fundamental SMD Crystal

- SMD in ceramic case (6.0 x 3.5 x 1.1) mm
- The whole package is grounded via the top metal lid and the two bottom pads.
- Available in many standard and special frequencies
- on Tape & Reel
- RoHS conform; Lead-free product
- Option: Tighter Tolerance, Tighter Stability, Extended Temperature

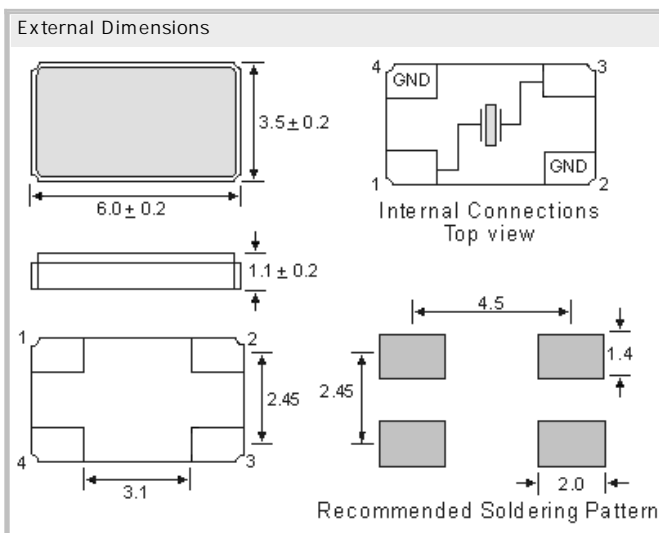

Specifications

| | |
|-------------------------------|--|
| Holder Type: | CM6035-4pad HFF Series |
| Frequency Range: | 80.000 to 200.000 MHz (fun.) Inverted mesa blank inside |
| Stand. Frequency (Part list): | 155.52 MHz, 156.250 MHz |
| Frequency Stability at 25°C: | ± 20 ppm |
| Temperature Stability: | ± 20 ppm @ -10°C to ~ +60°C |
| Storage Temperature: | -50°C to +105°C |
| Drive Level: | < 100µW max. |
| Load Capacitance (CL): | Customer Specified |
| Crystal Cut & Vibration Mode: | AT-cut, fundamental; |
| Equivalent Series Resistance: | R = 50 Ohm (fun.) |
| Aging: | < ± 3ppm max. / year (max.) |

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
8 5 5 8 6 P o i n g / G E R M A N Y
Phone +49 8121 778160 · Fax +49 8121 778177
e-Mail info@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Subject to change without prior notice.



Technical Data and Graphics are all under
Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
6 7 5 0 0 H a g u e n a u / F R A N C E
Phone +33 388 732162 · Fax +33 388 730118
e-Mail sales@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Sous réserve de modifications.