
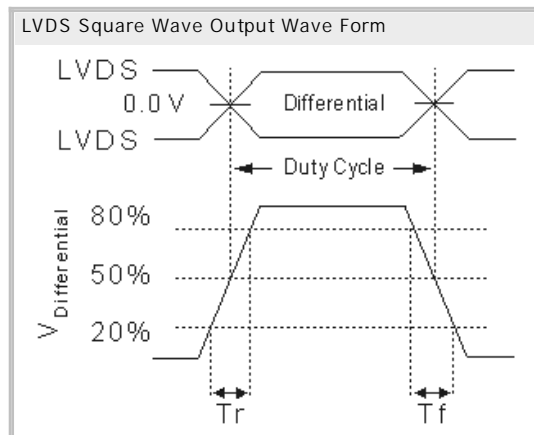


VCXO LVDS Differential Oscillator  
VCXO7050DW3.3 3.3V

- SMD in ceramic case (7.0 x 5.0 x 1.8) mm
- LVDS Square Wave Output Wave Form
- High Q fundamental crystal + multiplier circuit
- RoHS conform; Lead-free product
- Vibration: MIL-STD-202F method 204, 35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B, test cond. E, 1000GG 1/2 sine wave
- Available in many standard and special frequencies

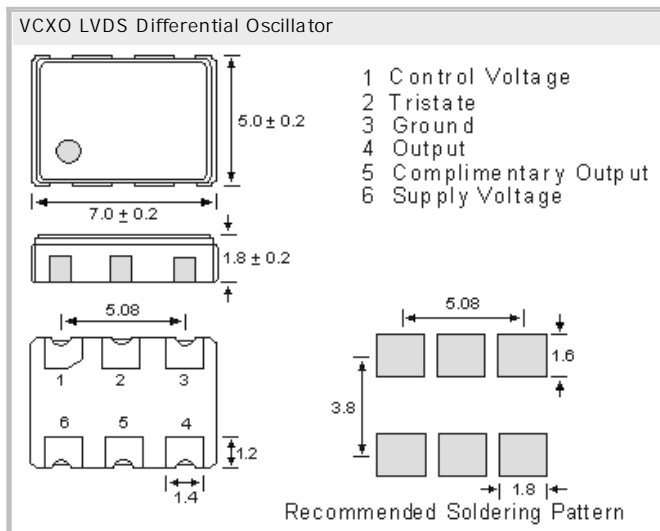

## Specifications - Product No. G200000000ACUUPC43BB

|                                     |   |
|-------------------------------------|---|
| Holder Type:                        | VCXO LVDS Differential Oscillator<br>VCXO7050DW3.3 3.3V (Voltage code is "3.3"); Tri-State on pad 2   |
| Frequency:                          | 200.000000 MHz  |
| Frequency Stability at 25°C:        | ± 50.0 ppm  |
| Operating Temperature Range:        | ± 50.0 ppm over -40°C to +85°C (inclusive of 25°C tolerance, ± 10% input voltage variation, load change, aging, shock and vibration )           |
| Frequency Deviation:                | ± 100ppm  |
| Storage Temperature:                | -55°C to +150°C   |
| Power Supply Voltage (Vdd):         | + 3.3V D.C. ± 5%  |
| Maximum Supply Current (15pF load): | 100 mA  |
| Load:                               | RL= 50 for (Vdd-2.0V)   |
| Output Logic Levels:                | High "1" Voh Vdd-1.025min., -0.95typ., -0.88max.; RL= 50 to (Vdd-2.0V)<br>Low "0" Vol Vdd-1.810min., -1.70typ., -1.62max.; RL= 50 to (Vdd-2.0V) |
| Output Symmetry (Duty Cycle):       | 50% ± 5% max.@ Vdd-1.3V   |
| Voltage Control:                    | 1.65V DC Center / 0.3V to 3.0V Range  |
| Rise/Fall Time:                     | 1.5ns max. @ 20% to 80% of PECL wave form   |
| Start Up Time:                      | 10 ms max.  |
| Tri-state Function Pin 2:           | When Pin 2 = 1, Output Enable<br>When Pin 2 (at 0.0V), Output High impedance, Disable current: 50µA max.  |
| Phase Jitter (12 kHz to 20 MHz):    | 2.6 ps typ., 4ps max., for 155.520MHz   |
| Phase Noise (155.520 MHz):          | -60dBc/Hz @ 10Hz, -90dBc/Hz @ 100Hz, -115dBc/Hz @ 1kHz<br>-125dBc/Hz @ 10kHz, -119dBc/Hz @ 100kHz, -120dBc/Hz @ 1MHz                            |
| Aging:                              | < ± 3ppm max. for the first year  |
| Input Impedance:                    | 2 M (min.)  |
| Reflow Condition:                   | 260°C max for 10 sec.   |

### GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14  
8 5 5 8 6 P o i n g / G E R M A N Y  
Phone +49 8121 778160 · Fax +49 8121 778177  
e-Mail [info@comtec-crystals.com](mailto:info@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Subject to change without prior notice.



Technical Data and Graphics are all under  
Copyright (c) of Comtec Crystals Group.

### FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon  
6 7 5 0 0 H a g u e n a u / F R A N C E  
Phone +33 388 732162 · Fax +33 388 730118  
e-Mail [sales@comtec-crystals.com](mailto:sales@comtec-crystals.com)  
Internet: <http://www.comtec-crystals.com>  
Sous réserve de modifications.