
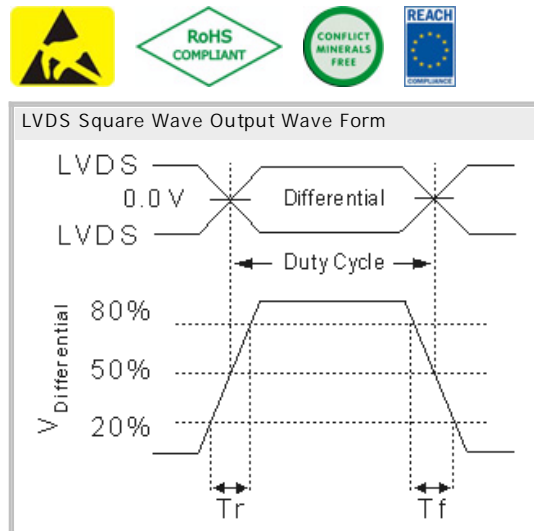


Clock Oscillator LVDS Differential
CXO7050DQN2.5, 2.5V, 0.6ps typical Phase Jitter

- SMD in ceramic case (7.0 x 5.0 x 1.8) mm
- Tri-State Enable / Disable on pad No. 1
- LVDS Square Wave Output Wave Form
- High Q fundamental crystal + low jitter multiplier circuit + ultra low jitter multiplier circuit
- RoHS conform; Lead-free product; on Tape (16mm) & Reel
- Vibration: MIL-STD-202F method 204, 35G, 50 to 2000 Hz
- Shock: MIL-STD-202F method 213B, test cond. E, 1000GG 1/2 sine wave
- Available in many standard and special frequencies

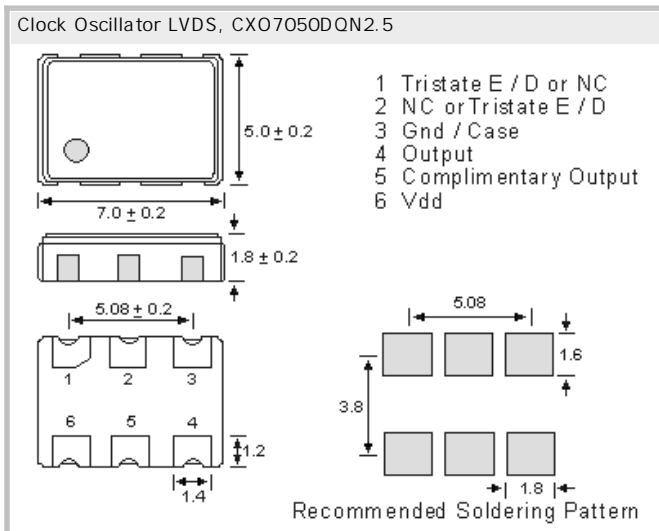

Specifications - Product No. G312500000HWSUPN43AB

Holder Type / Voltage (Vdd):	CXO7050DQN2.5; + 2.5V D.C. ± 5%; Tri-State on pad 1
Frequency:	312.500000 MHz
Frequency Stability at 25°C:	± 25.0 ppm
Operating-/Storage -Temperature Range	± 25.0 ppm, -40°C to +85°C // -55°C to +150°C
Storage Temperature:	-55°C to +150°C
Power Supply Voltage (Vdd):	+ 2.5V D.C. ± 5%
Maximum Supply Current (15pF load):	21 mA
Output Logic:	"High", 1: 1.4V (typical); 1.6V (max.), RL = 100 Ohm "Low", 0: 0.9V (min); 1.1V (typical), RL = 100 Ohm
Output Voltage Swing:	250mV min., 350 typ., 450mV max., RL = 100 Ohm
Output Offset Voltage, (Vos):	1.25V typical
Vos Magnitude Change (Vos):	50mV max.
Duty Cycle (50% Vdd):	50% ± 5% max.
Load:	100 Ohm between output and complimentary output
Rise (Tr)/Fall Time (Tf):	0.2ns typical; 0.5ns max. (20% Vdd <-> 80% of the LVDS wave form)
Start Up Time:	5 ms typical; 10ms max.
Tri-state Function Pin1(or2)No Connect.:	Differential LVDS and complimentary LVDS outputs
Tri-state Disable:	When 30% max. of VDD to Disable Output Disable current: 16mA max., Disable time: 50n sec. (max.)
Tri-state Enable:	When 70% min. of VDD to Enable Output Enable time: 200n sec. (max.)
Phase Jitter:	0.6 ps typ. (12 kHz to 20 MHz); < 100 fs (1.875 MHz to 20MHz)
Phase Noise (156.250 MHz):	-67dBc/Hz @ 10Hz, -92dBc/Hz @ 100Hz, -112dBc/Hz @ 1kHz -121dBc/Hz @ 10kHz, -124dBc/Hz @ 100kHz, -136dBc/Hz @ 1MHz, -153dBc/Hz @ 5MHz
Aging:	< ± 2ppm max. for the first year; ± 10ppm max. over 10 years
Reflow Condition:	260°C max for 10 sec.

GERMANY:

COMTEC CRYSTALS GmbH · Sultenstrasse 12-14
8 5 5 8 6 P o i n g / G E R M A N Y
Phone +49 8121 778160 · Fax +49 8121 778177
e-Mail info@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Subject to change without prior notice.



Technical Data and Graphics are all under
Copyright (c) of Comtec Crystals Group.

FRANCE:

COMTEC CRYSTALS SARL · 23, rue du Faucon
6 7 5 0 0 H a g u e n a u / F R A N C E
Phone +33 388 732162 · Fax +33 388 730118
e-Mail sales@comtec-crystals.com
Internet: <http://www.comtec-crystals.com>
Sous réserve de modifications.

